


TORNADO®

R8/80/15 STOCK FENCE

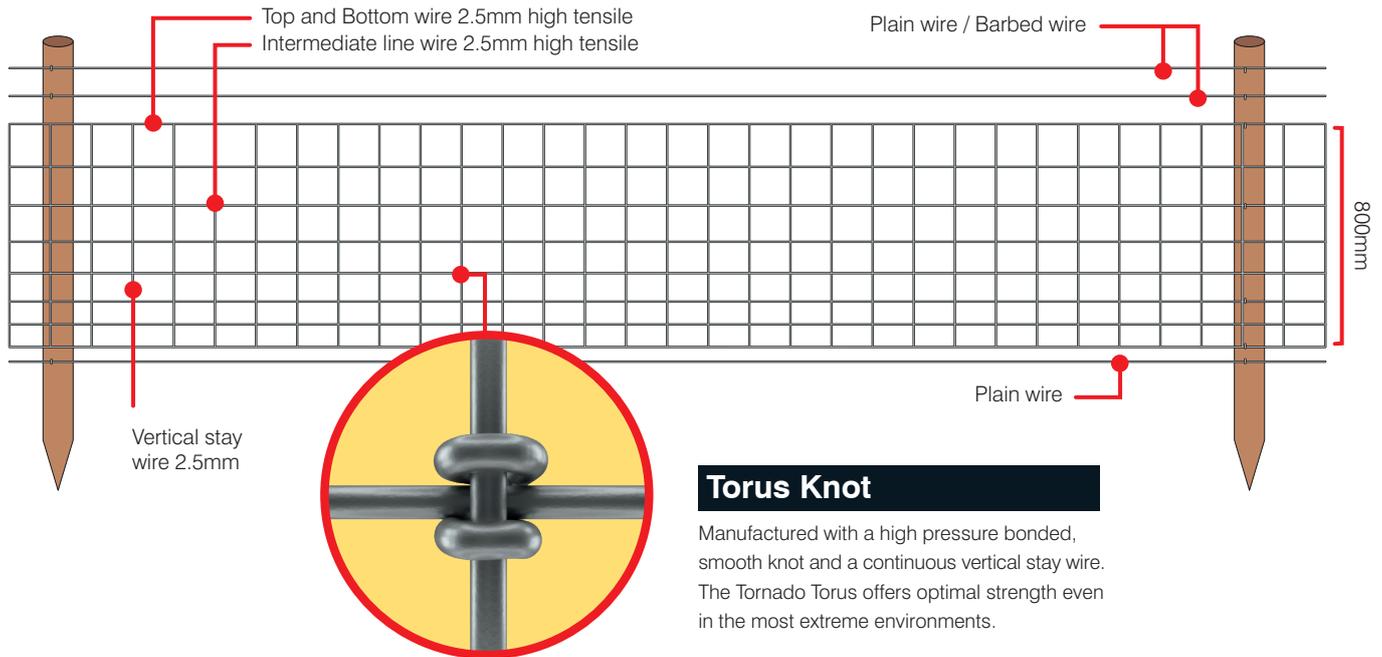

Torus Knot

Manufactured with a high pressure bonded, smooth knot and a continuous vertical stay wire. The Tornado Torus offers optimal strength even in the most extreme environments.

Description

R8/80/15 is Tornado's most popular Torus high tensile fence. It features solid vertical wires and the unobtrusive high pressure bonded Torus knot which does not have any sharp edges. Tornado Torus Stock Fence is manufactured with high tensile wire which strains tighter than mild steel and so requires fewer intermediate posts, making it quicker to erect. It does not stretch with weathering so does not need to be retightened annually.

Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating. Two strands of barbed wire or a single electrified wire can be added to the top of the fence. For more information on installation please refer to BS1722 part 2

Suitable For

All livestock

Specification

| | |
|--------------------------------------|--|
| Number of line wires | 8 |
| Overall height | 80cm |
| Distance between stay wires | 15cm |
| Top & bottom line wire specification | 2.5mm diameter - 1235 - 1390 N/mm ² |
| Intermediate line wire specification | 2.5mm diameter - 1235 - 1390 N/mm ² |
| Vertical stay wire specification | 2.5mm diameter - 695 - 850 N/mm ² |
| Approx. weight per 100m roll | 56.77kg |
| Material composition | Heavily galvanised steel wire |

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

TORNADO®

Latest update: 08/10/20

sales@tornadowire.com

Tel: +44 (0) 1789 778 766



INVESTORS IN PEOPLE | Gold

TORNADO®

R8/80/15 STOCK FENCE

British & European Standards

- BSEN 10218** Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.
- BSEN 10223** Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.
- BSEN 10244** Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).
- BS EN ISO9001** Tornado Wire Ltd operates a quality management system certified to this standard.

Sustainability

All Tornado products are 100% recyclable.

Traceability


This fence is batch marked and can be traced back to point of manufacture.

Health & Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

Product Codes

| | |
|-----------|------------|
| 100m roll | RZST088002 |
| 250m roll | RZST088005 |
| 500m roll | RZST088008 |

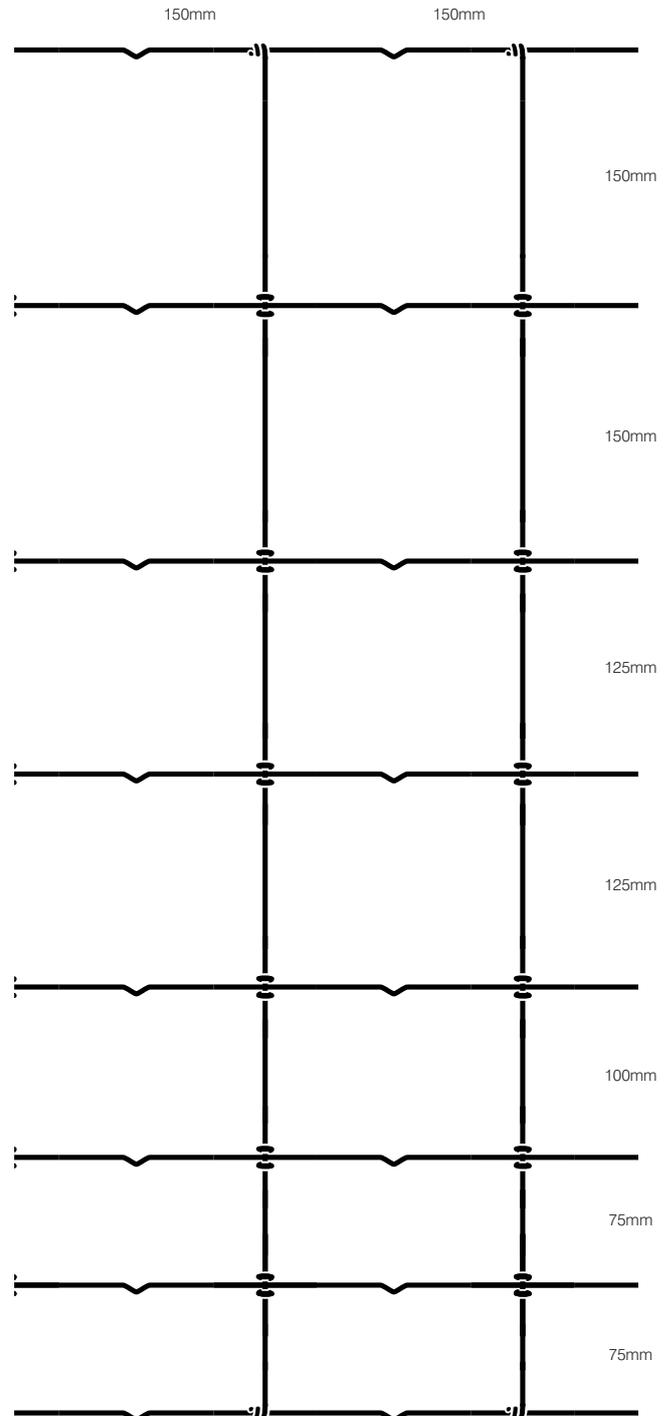

Tornado Wire Limited, Bidford-on-Avon, Alcester, Warwickshire, B50 4JH. Tel: +44 (0) 01789 778 766 | www.tornadowire.com | email: sales@tornadowire.com

TORNADO®

Latest update: 08/10/20

sales@tornadowire.com

Tel: +44 (0) 1789 778 766



INVESTORS IN PEOPLE | Gold