

HM 8 - 400

Specifications

Infeed height:	400 mm
Infeed width:	670 mm
Transport height:	2.588 mm
Transport width:	2.265 mm
Ejection height:	up to 4.100 mm
Working height:	800 mm
Working width:	3.180 mm
Conveyor belt:	600 mm
Infeed Table length:	900 mm
Standard-sieve:	35/40 mm
Pressure roller Ø:	450 mm
Chipping drum Ø:	495 mm
Flywheel Ø:	1.370 mm
Length:	3.650 mm
Flywheel mass:	470 kg
Support load:	1.200 kg
Weight:	3.800 kg
Drive speed:	max. 750 rpmn
max. Performance:	
at 540 rpm	100 kW / 136 HP
at 750 rpm	139 kW / 190 HP

Chassis

- Chassis 25 km/h with cable handbrake
- Chassis 40 km/h with spring loaded pneumatic break
- Height of towing port: 850 - 950 mm adjustable or Hitch - height of towing port with 500 mm
- Tyres:
 - » 400 / 60 - 15.5
 - » 480 / 45 - 17






HIGHLIGHTS



Hitch -
height of towing port 500 mm

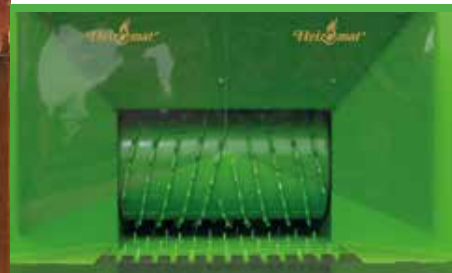

Top pressure roller Ø 450 mm
with conveyor belt



Own oil supply



Discharge chute and flap electrical



Integrated toolbox
incl. tools

