

TITAN 43/20J STANDARD

The TITAN 43/20J standard firewood processor with electronic control lever (joystick) is, in comparison to mechanical machine, completed and advanced version. It ensures easy operation and fast work.



TITAN 43/20J standard CD



For easier work, the LT650 lifting table with a width of 1700 mm can be mounted in the front.



Control Panel

1. Activation in case of an electric motor.
2. Harvest chainsaw bar speed regulation.
3. Emergency stop.
4. Optional deactivation switch for the retaining plate.
5. On/off and reverse movement adjustment of the conveyor belt.
6. Switch for saving time when splitting short logs.
7. Electronic control lever - joystick.



Mechanical winch for adjusting conveyor height.



Hydraulically adjustable height of the splitting knife
2-4, 2-6, 2-8, 2-12.



Durable and powerful harvest chainsaw bar.




Log deck.




TITAN 43/20J STANDARD

- Operated with an electronic control lever (joystick)
- Compact bi-directional chain conveyor belt
- Harvester chainsaw bar
- Small and ergonomic

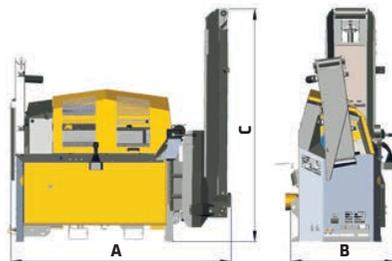

Conveyor belt speed regulation.



1. Oil tank for automatic chain lubrication with an oil level indicator.
2. Splitting length 25, 33, 40 or 50 cm.
3. The pressure gauges indicate the splitting pressure and the system pressure for auxiliary functions.
4. Chain lubrication adjustment system.



Shutter for retaining the log deck during transport.



Conveyor belt adjusting position L/R ±15°.

Class

TITAN 43/20J STANDARD

Model		CD	E	CD+E
Engine power	kW	/	11	11
Recommended tractor power	kW/HP	30/40 (Transport 60/80)	/ (Transport 60/80)	30/40 (Transport 60/80)
Max. cutting diameter	mm	430	430	430
Splitting force	kN/t	200/20	200/20	200/20
Log lengths	cm	25, 33, 40, 50	25, 33, 40, 50	25, 33, 40, 50
Conveyor belt slew (L/R ± 15°)		hydraulic	hydraulic	hydraulic
Control		Joystick	Joystick	Joystick
Weight*	kg	1220	1270	1285
Dimension	A	2550	2580	2580
	B	1280	1280	1280
	C	2650	2650	2650
Oil quantity	l	100	100	100
Telescopic conveyor belt with a mechanical winch for height adjustment and telescopic cylinder (L 5000 / W 350)		●	●	●
Einstellung der Höhe des Spaltmessers		hydraulic	hydraulic	hydraulic
Greifer zur Stammfixierung		hydraulic	hydraulic	hydraulic
Splitting knife 2-4	1 pcs	●	●	●
Splitting knife 2-6 / 2-8 / 2-12	1 pcs	●	●	●
Oil heater		/	●	●
Oil cooler		●	●	●
Separator		●	●	●

● Standard | ● Option | / Not possible | CD - PTO (tractor drive) | CD-E - Combination | TR - Wheels | *The weight of the tractor is important during transport.